INCH-POUND

MIL-DTL-25677/2 11 December 1998 SUPERSEDING MS24480 ASG Rev B 18 December 1964

DETAIL SPECIFICATION SHEET

CAP, LUBRICATING FITTING, PROTECTIVE, PRESSURE SERVICING ADAPTER

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-25677.

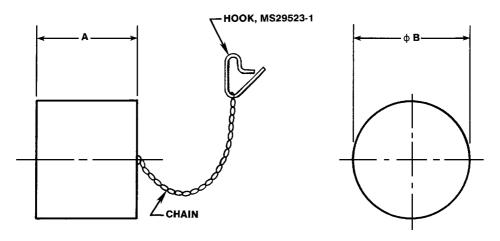


FIGURE 1. Cap.

MIL-DTL-25677/2

TABLE I. <u>Dimensions</u>.

Part number	A MAX	B MAX	Weight MAX lb	For use with adapter
MS24480-1	1.75	2.00	.25	MS24476-1
MS24480-2	2.12	2.50	.35	MS24476-2

REQUIREMENTS:

- 1. The cap shall be in accordance with figure 1 and table I.
- 2. Material: see acquisition specification.
- 3. Chain shall be of sufficient strength and length to prevent accidental loss of cap and to permit easy installation.
- 4. Attachment point and method of attaching the chain to the cap is optional.

NOTES:

- 1. Dimensions are in inches.
- 2. Outline represents the maximum envelope of the cap.
- 3. The MS24480 part numbers have been retained.
- 4. For design feature purposes, this specification sheet takes precedence over the acquisition document referenced herein.

CONCLUDING MATERIAL

Custodians:

Air Force - 99

Navy - AS

Preparing activity:

DLA - CC

(Project 4730-0884)

Review activity: Air Force - 82